



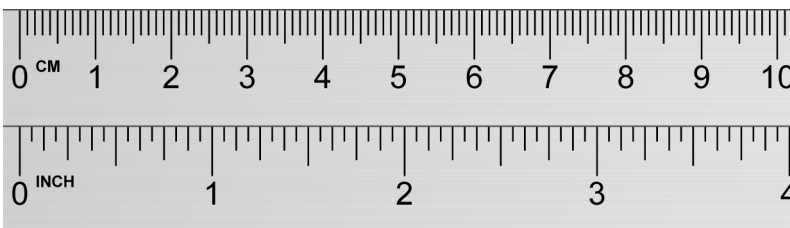

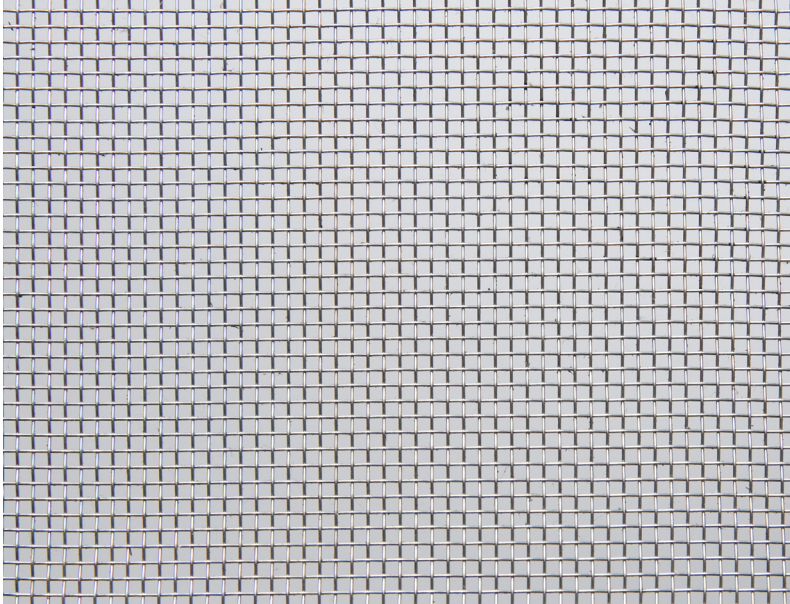

PARENT PRODUCT CODE

SSWO 01670 - - - -


See table below for complete product codes



This document is to scale when printed to A4 with no scaling applied. Please use ruler above to check your scale. Images are provided as a guide only.

-  Application Pages
-  Care Page
-  Glossary Page
-  Testing Page

METRIC



Aperture 1.67 mm

Wire Diameter 0.45 mm

Stock Status Stocked

Finish Uncoated
Mill Finish

Weave Type Plain Weave

Approx Kg/m²* 1.24 kg/m²

Approx % Open Area* 62 %

* Pre black powder coat finish

TESTING / STANDARDS

Mesh is Tested / Manufactured to*






ASTM E2016-15
Standard Specification for Industrial Woven Wire Cloth ✓ Manufactured to



AS 3959-2018
Construction of Buildings in Bushfire Prone Areas ✓ Aperture < 2mm
Corrosion Resistant
Non Combustible

FCO-3313 Rev B
CSIRO Advisory Report regarding 'Bushfire Mesh' range & criteria of AS 3959-2018Amdt 1 ✓ BAL 12.5 - FZ
If used in the prescribed construction manner

PRODUCT CODE	GRADE	 Width mm	 Length m	 Diam. mm	APPROX Kg/Roll
SSWO 01670 0914	304	915 mm	30 m	200 mm	34 Kg
SSWO 01670 0916	316	915 mm	30 m	200 mm	34 Kg
SSWO 01670 1244	304	1245 mm	30 m	200 mm	46 Kg
SSWO 01670 1246	316	1245 mm	30 m	200 mm	46 Kg
SSWO 01670 1554	304	1550 mm	30 m	200 mm	58 Kg
SSWO 01670 1556	316	1550 mm	30 m	200 mm	58 Kg
SSWO 01670 1836 30	316	1830 mm	30 m	200 mm	68 Kg